



SUNDOG RFID



INVENTORY TRACKING POLYMER COMPOSITE STAPLES




SH/08-100RF US
(902-928 MHz)

SH/08-100RF EU
(864-869 MHz)

Packaging:
250 tags per box
8 boxes per case

1"
(25 mm)
Length

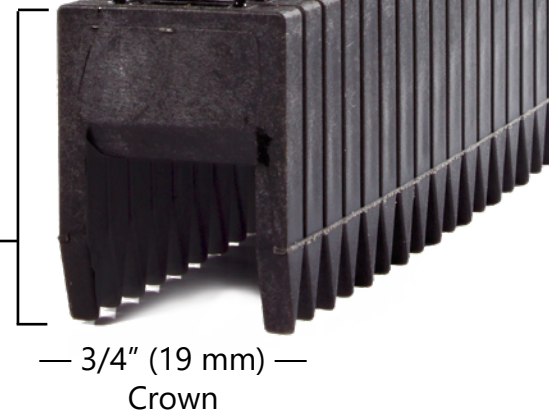

— 3/4" (19 mm) —
Crown

APPLICATIONS

- Log tagging and tracking
- Pallet tagging and tracking
- Utility pole marking
- Railroad Tie Marking



BENEFITS

- Eliminate labor for reading tags
- Instantly read multiple tags
- Real time inventory
- Reduce inventory losses



FEATURES

- Aerospace grade polymer composite
- Will not trip metal detector
- Rugged & flexible
- UHF radio frequency ID
- Able to attach to rough wood
- Manual or pneumatic installation
- High read range (distance, angle)



Embedded microchip

128 Bits EPC Memory
32 Bits User Memory




Required Tools

Designed exclusively for Sundog RFID staples




HT-RFID Manual Hammer Tacker

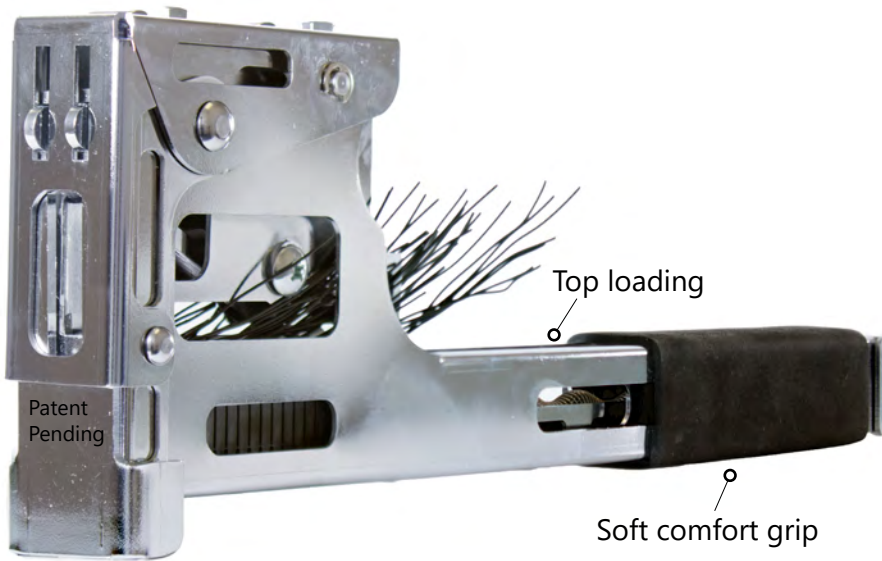

Technical Data

Model No.	HT-RFID
Capacity	25 tags
Weight	3.75 lbs (1.7 kg)
Dimensions (LxWxH)	14.5" x 1.75" x 5.19" (368 x 44 x 127 mm)

OMER RFID.25 Pneumatic

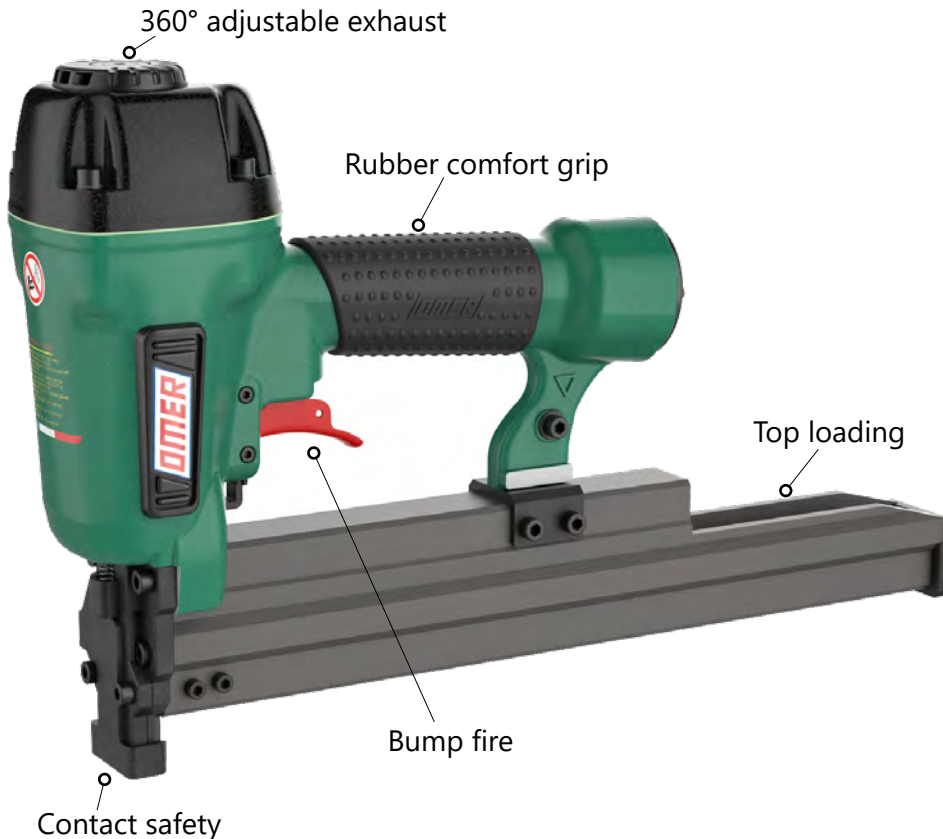

Technical Data

Model No.	RFID.25
Capacity	50 tags
Weight	5 lbs (2.27 kg)
Dimensions (LxWxH)	15.1" x 3" x 9.6" (384 x 77 x 243 mm)
PSI	70 -100 psi 5 - 7 bar
Safety	Contact

