




Sundog RFID Staple Hammer Tool Application

Products

- SH/08-100RF US
- SH/08-100RF EU
- Manual Hammer Applicator Tool

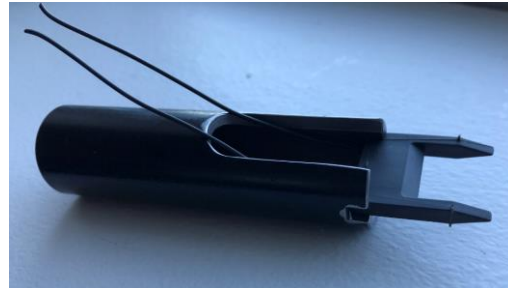

Proper Techniques

- Insert RFID Tag with the antennae wires in the tool cutout, and the staple edges flush in the tool
- Hold the staple tag and tool perpendicular to the wood surface and hammer into the wood surface.
- The tool edge will push the staple tag into the wood surface with about 1/8" exposed.



Important Notes

- This hammer application tool is only intended for trial or testing purposes. Using this technique will result in more cracking and splitting of the wood, and will not drive as smoothly or effectively as using the pneumatic air or hammer tacker tools.